

# Additel 925

## Handheld Hydraulic Pressure Test Pump



- Generate 85% vacuum to 6,000 psi (400 bar) pressure
- Portable, only 3.7 lb
- Minimal maintenance
- Increase and decrease pressure smoothly
- Hand-tight quick connectors

**Distributor Indonesia**  
**PT TRIWI PUTRA JAYA**  
 Taman Surya 3.H7.N0.17 Jl. Daan Mogot  
 Pegadungan – Kalideres, Jakarta 11830  
 ☎ +62 21 541 7194 Fax: +62 21 451 4630  
 📠 +62 818 920 386 - +62 822 9908 5294  
 📧 info@trwi-online.com / sales@pttrwi.com  
 🌐 www.trwi-online.com / www.pttrwi.com



### OVERVIEW

The 925 Hydraulic Pressure Test Pump is a hand operated pressure pump designed to generate pressure from 85% vacuum to 6,000 psi (400 bar). With the patented screw press technology, the high pressure can be easily generated, as well as increased and decreased smoothly. With no check valve (non-returning valve), the 925 avoids the troublesome leakage issues that is usually experienced with most hand pumps and allows for minimal maintenance. Two hand-tight quick connectors installed on the pump allow easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches. The 925 is an ideal comparison test pump for calibrating pressure measuring instruments such as test gauges, indicators or transducers in the field or laboratory.

### FEATURES


- **Portable**  
Only 3.7 lb (1.7 kg)
- **Durable and Minimal Maintenance**  
Patented screw press technology, without non-returning valve inside that is usually used on troublesome hand pumps.
- **Easy-to-use**  
The high pressure can be generated easily, as well as increased and decreased smoothly.
- **Extremely Low Leakage**  
Patented screw press technology, replaces troublesome check valves (non-returning valve) used in most hand pumps which practically eliminates leakage.
- **Hand-tight Quick Connectors**  
Allows easy connecting and disconnecting to the test pump without the need for PTFE tape or wrenches.

### SPECIFICATIONS

- **Media:** Oil or deionized water.  
(Oil is default media liquid. Pump with water as media to be ordered as ADT925W. Pump stability is best when used with oil. Performance may decrease when used with water as the media.)
- **Reservoir capacity:** 200 ml (12.2 in<sup>3</sup>)
- **Pressure Range**  
85% vacuum to 6,000 psi (400 bar) positive pressure.
- **Material:** Ram/adapters: SS  
Body: SS, aluminum  
Seals: Buna-N, PTFE, Copper Alloy
- **Connection**  
Hand-tight connectors for both test gauge and reference gauge.  
1/4NPT female, 1/2NPT female, 1/4BSP female, 1/2BSP female, or M20X1.5 female
- **Dimensions:** Height: 4.72" (120 mm)  
Base: 9.84" (250 mm) x 5.51" (140 mm)
- **Weight:** 3.7 lb (1.7 kg).
- **Warranty:** 1 year
- **Piston volume**  
Low pressure piston: 18 ml (1.1 in<sup>3</sup>)  
High pressure piston: 0.9 ml (0.05 in<sup>3</sup>)

### ORDERING INFORMATION

#### Model Number

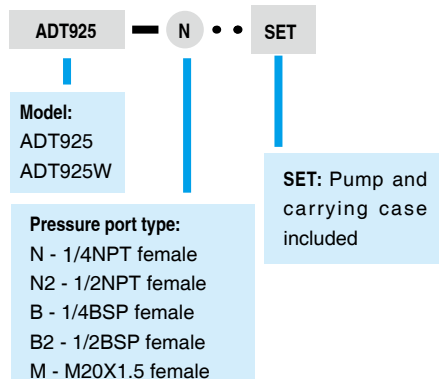

#### Accessories included

- Mineral oil, 1 bottle (250 ml)\*
- O-ring: 20 pcs
- Manual: 1 pc
- Carrying case (925-X-SET models only)

\* When water media is not requested

#### Optional Accessories

Model number	Description
9202	Mineral Oil, 1 liter (1 quart)
ADT102	Adapters and fittings, 1/4NPT male to various male and female connection (25 pcs).
ADT103	Adapters and fittings, 1/4NPT (1/2NPT, 1/4BSP, 1/2BSP, or M20X1.5) male to various female hand-tight quick connectors (10 pcs).
ADT100-HTK-8K	Hose test kit, 5 feet flexible hose, 8,000 psi, user selectable male (1/4NPT, 1/2NPT, 1/4BSP, 1/2BSP, M20) to user selectable female hand tight quick connector.
9901-925	Carrying Case for one 925 pump and two 681 gauges or 672 calibrators
ADT925-MK	Maintenance kit for Additel 925 pump